


**Normas de Diseño:**

Roscado NPT ANSI B1.20.1

**Material:** Acero Inoxidable ASTM A351  
CF8 (304) y CF8M (316)

Presión de Trabajo:

300 PSI @ -28°C a 38°C / 150 SWP

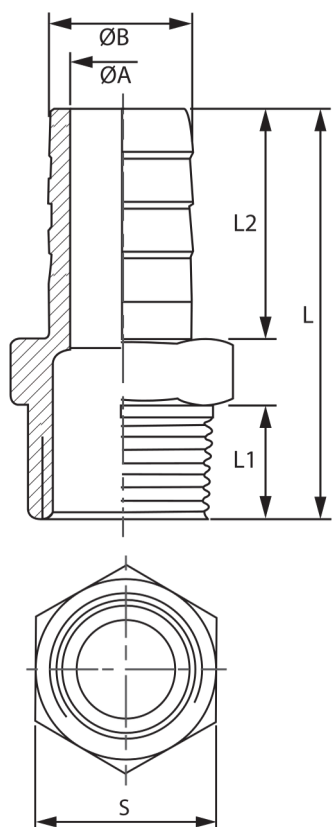

| Medida | A    | B    | L1   | L2   | L    | S    | Peso |
|--------|------|------|------|------|------|------|------|
| Inch   | mm   | mm   | mm   | mm   | mm   | mm   | KG   |
| 1/8"   | 3    | 6    | 10   | 19   | 34   | 12.5 | 0.01 |
| 1/4"   | 4    | 8    | 11.5 | 25   | 43   | 15   | 0.02 |
| 3/8"   | 5    | 10   | 13   | 29.5 | 49   | 19   | 0.03 |
| 1/2"   | 7    | 13   | 15   | 33   | 56.5 | 23   | 0.06 |
| 3/4"   | 15   | 20   | 15.5 | 34   | 60   | 28   | 0.09 |
| 1"     | 19.5 | 25   | 19   | 39   | 69   | 37   | 0.16 |
| 1 1/4" | 26.5 | 32   | 22   | 37   | 70   | 45   | 0.23 |
| 1 1/2" | 33.5 | 40   | 22   | 47.5 | 80   | 50   | 0.42 |
| 2"     | 44   | 51   | 22.5 | 53.5 | 88   | 62   | 0.60 |
| 2 1/2" | 54   | 63.5 | 29.5 | 65   | 108  | 79   | 0.79 |
| 3"     | 68   | 76.5 | 27   | 68   | 110  | 91.5 | 0.93 |
| 4"     | 91   | 102  | 30.5 | 74   | 120  | 117  | 2.11 |

\* Fotos y medidas referenciales, sujetas a cambios sin previo aviso por parte del proveedor o fabricante.