

NEEDLE VALVE 6000 PSI CF8M (316) FEMALE THREADED NPT




* Reference photo

DESIGN FEATURES:

Investment casting
Screwed-in bonnet
Rising stem
T handle or handwheel operation
Connecting threads: NPT ANSI/ASME B1.20.1
Working pressure: 6000 lb/in²
Female x female (fxf) threaded ends
Test standard: API 598

MATERIAL LIST

	PART NAME	MATERIAL	QTY.
1	SET SCREW	SS304	1
2	HANDLE	SS410	1
3	STEM	SS316	1
4	GLAND NUT	SS304	1
5	GLAND	SS304	1
6	PACKING	TEFLON	1
7	BONNET	ASTM A351 Gr. CF8M	1
8	BODY	ASTM A351 Gr. CF8M	1

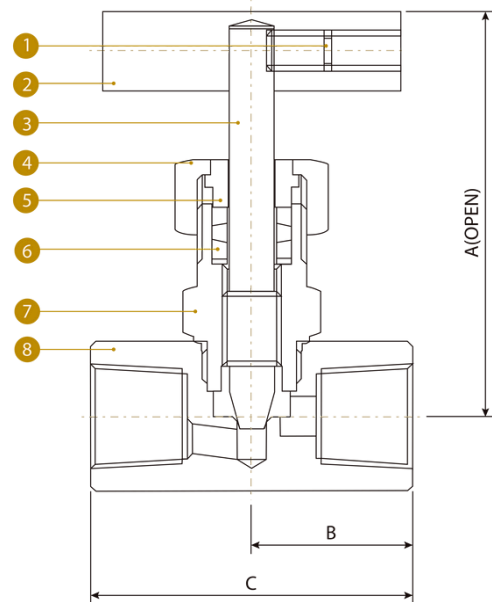

DIMENSIONS (mm)

MEDIDA	L	L1	T	PESO (Kg)
1/8"	75	29.0	58	0.35
1/4"	75	29.0	58	0.35
3/8"	75	29.0	58	0.35
1/2"	87	32.5	65	0.56
3/4"	90	35.0	70	0.70
1"	103	40.0	80	1.30

**Note : Dimensions, design and materials are subject to change without notice.*



**CORPORACIÓN
GMA PERÚ E.I.R.L.**



Av Argentina 530 - C.C El Progreso 1 - INT 1877- 78 - CERCADO DE LIMA



ventas01@corgmaperu.com



949467827 - 934094909