

GLOBE VALVE FULL PORT 200 PSI CF8M (316) THREADED NPT




* Reference photo

DESIGN FEATURES:

Pressure rating: 200 PSIG (non-shock)
Steam rating: 150 PSI WSP
Investment cast body & bonnet
Bottom-loaded, blow-out-proof stem
Screwed bonnet
Rising stem and wheel
Threaded end NPT ANSI/ASME B1.20.1
Test standard: API 598

MATERIAL LIST


	PART NAME	MATERIAL	QTY.
1	NUT	SS304	1
2	HANDWHEEL	SS400	1
3	STEM	ASTM A276 Gr. 316	1
4	GLAND NUT	ASTM A351 Gr. CF8	1
5	GLAND	ASTM A351 Gr. CF8M	1
6	GLAND PACKING	PTFE	1
7	BONNET	ASTM A351 Gr. CF8M	1
8	GASKET	ASTM A351 Gr. CF8M	1
9	BODY	PTFE	1
10	DISC	ASTM A351 Gr. CF8M	1

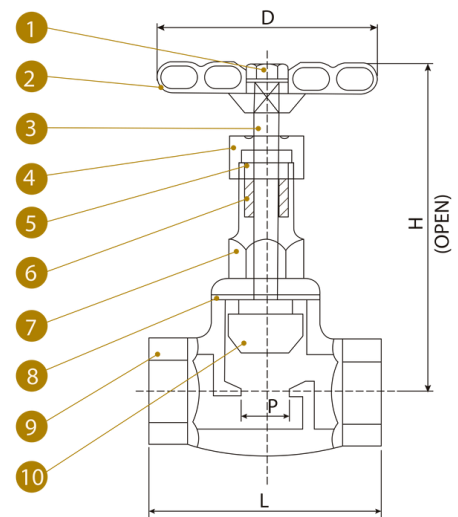

DIMENSIONS (mm)

MEDIDA	P	L	H	D	CV FACTOR	PESO (Kg)
1/2"	12	66.0	95	70.0	19	0.42
3/4"	15	68.5	99	70.0	37	0.46
1"	20	78.3	102	76.5	64	0.62
1 1/4"	25	86.0	126	76.5	103	1.05
1 1/2"	33	98.0	136	103.5	143	1.40
2"	40	110.5	155	121.0	360	2.10

PRESSURE TEMPERATURE RATINGS

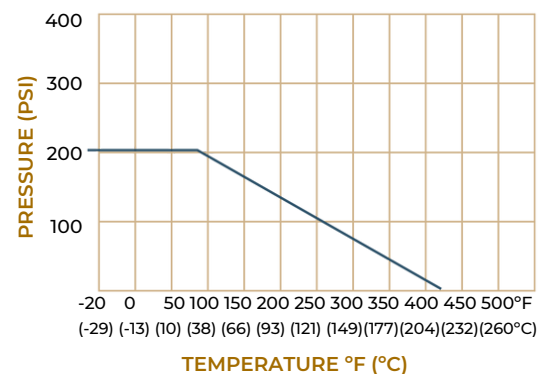

* Note : Dimensions, design and materials are subject to change without notice.



**CORPORAÇÃO
GMA PERÚ E.I.R.L.**



Av Argentina 530 - C.C El Progreso 1 - INT 1877- 78 - CERCADO DE LIMA



ventas01@corgmaperu.com



949467827 - 934094909