

CHECK SWING VALVE FULL PORT 200 PSIG CF8M (316) THREADED NPT



* Reference photo

DESIGN FEATURES:


Pressure rating: 200 PSIG (non-shock)
Steam rating: 150 PSI WSP
Investment cast body & cap
Screwed cap
Swing type disc
Threaded end NPT ANSI/ASME B1.20.1
Test standard: API 598

MATERIAL LIST


	PART NAME	MATERIAL	QTY.
1	BODY	ASTM A351 Gr. CF8M	1
2	CAP	ASTM A351 Gr. CF8M	1
3	DISC	ASTM A351 Gr. CF8M	1
4	HINGE PIN	SS316	1
5	GASKET	PTFE	1
6	PLUG	SS316	1

DIMENSIONS (mm)

MEDIDA	A	L	H	CV FACTOR	PESO (Kg)
1/4"	-	-	-	-	0.147
3/8"	-	-	-	-	0.234
1/2"	15	66.0	46	30	0.30
3/4"	20	81.0	54	37	0.342
1"	25	91.0	60	54	0.63
1 1/4"	32	106.5	72	103	0.823
1 1/2"	40	121.0	75	143	1.162
2"	50	142.0	82	360	1.345
2 1/2"	65	159.0	90	440	2.803
3"	80	190.0	104	520	3.935
4"	100	235	133.3	-	7.546

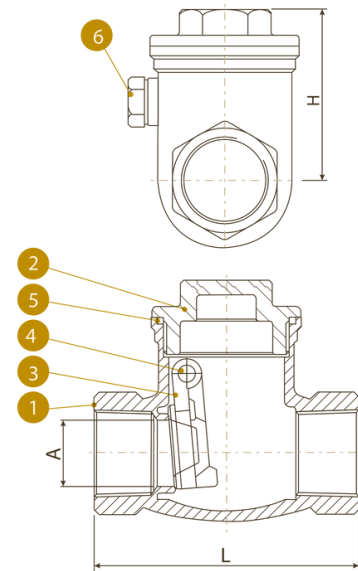

PRESSURE TEMPERATURE RATINGS

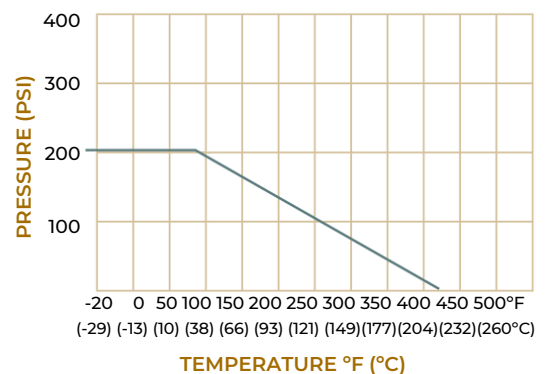

* Note : Dimensions, design and materials are subject to change without notice.



**CORPORACIÓN
GMA PERÚ E.I.R.L.**



Av Argentina 530 - C.C El Progreso 1 - INT 1877- 78 - CERCADO DE LIMA



ventas01@corgmaperu.com



949467827 - 934094909